



1

Opening the option box, please check that the card comes with a metal bracket and two screws. The metal bracket must be fixed to the BMC Daughterboard with the remaining screw hole in a position to secure it to the M/B.

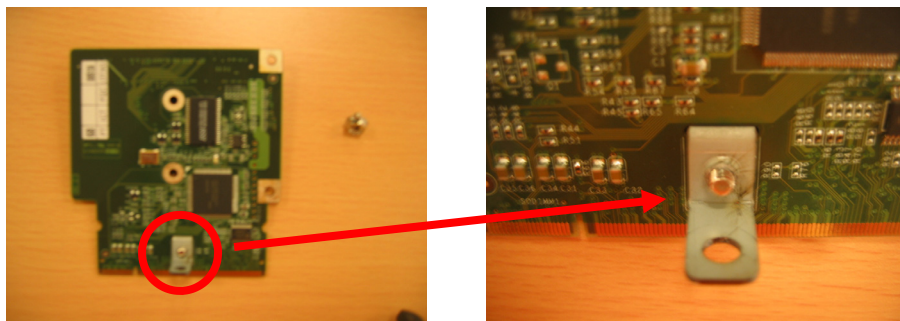


2

Plug the BMC module into the specific black slot, like shown in the picture.

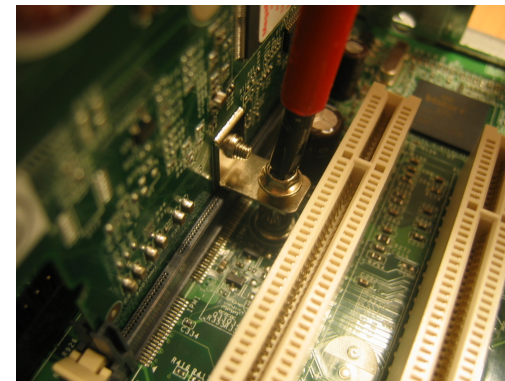

3

Fix the module with the screw to the M/B.

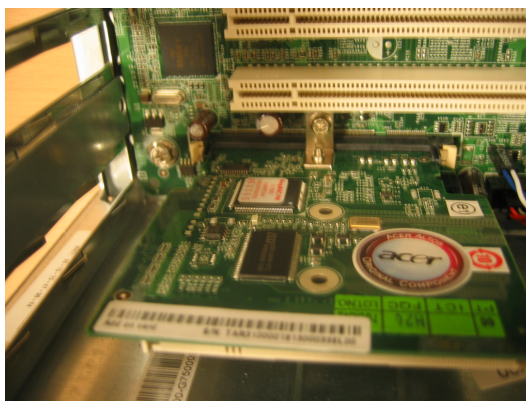

4

Please download the latest BMC firmware, FRU and SDR from the Acer support website and upgrade the system.

<http://support.acer-euro.com>